

## DIE RICHTIGE AUSWAHL

Die Wurfweite ist im Allgemeinen eines der ersten Kriterien bei der Auswahl eines Regners. Die aufgeführte Tabelle erlaubt Ihnen, eine Vorauswahl unter den Versenregnern zu treffen.




### PGJ



2.1 - 3.4 bar  
0.15 - 1.20 m<sup>3</sup>/h  
16 - 22 mm/h  
14°




### PGP

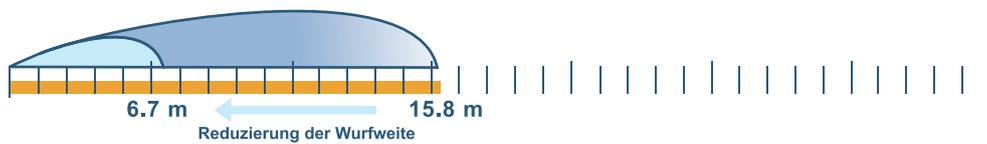

2.0 - 5.0 bar  
0.11 - 3.27 m<sup>3</sup>/h  
4 - 30 mm/h  
13° oder 25°




### I-20 Ultra

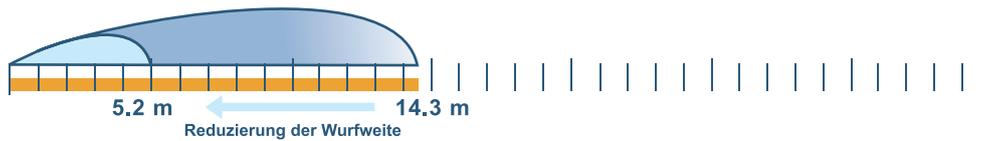

2.1 - 4.8 bar  
0.20 - 1.86 m<sup>3</sup>/h  
6 - 38 mm/h  
13° oder 25°




### I-31 Plus

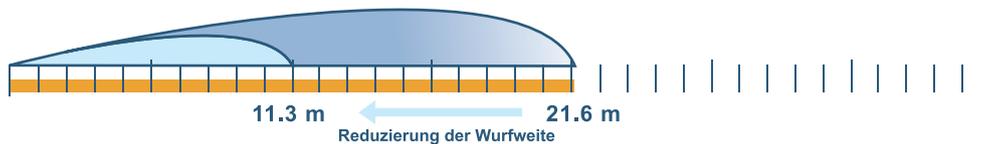

2.8 - 6.9 bar  
0.86 - 7.16 m<sup>3</sup>/h  
13 - 40 mm/h  
25°




### I-35 Sierra

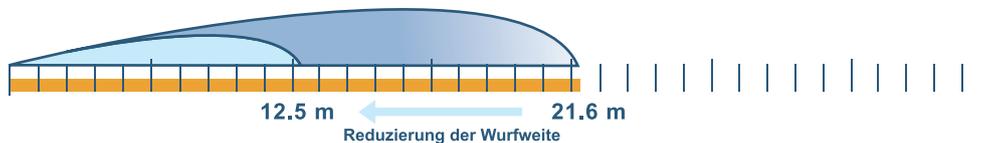

2.5 - 7.0 bar  
1.65 - 7.24 m<sup>3</sup>/h  
17 - 31 mm/h  
25°




### I-41

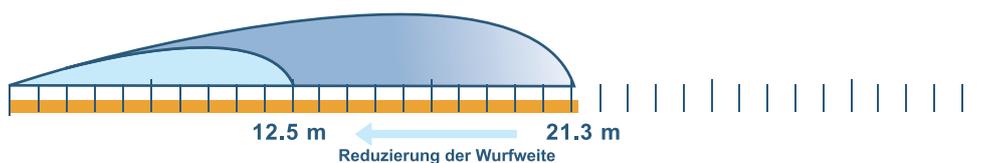

2.8 - 6.2 bar  
1.59 - 6.25 m<sup>3</sup>/h  
20 - 38 mm/h  
25°



### I-60

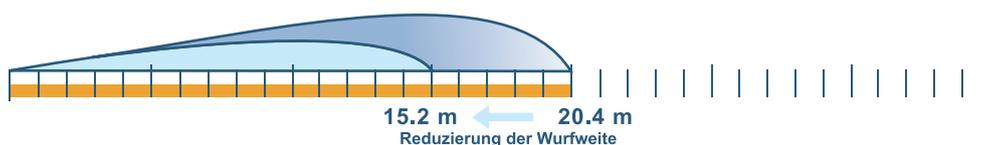

2.8 - 4.1 bar  
1.48 - 4.63 m<sup>3</sup>/h  
7 - 26 mm/h  
25°

