

## DIE RICHTIGE AUSWAHL

Die Wurfweite ist im Allgemeinen eines der ersten Kriterien bei der Auswahl eines Regners. Die aufgeführte Tabelle erlaubt Ihnen, eine Vorauswahl unter den Versenregnern zu treffen.




### 3500



1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
14 - 21 mm/h  
14°



### 5000

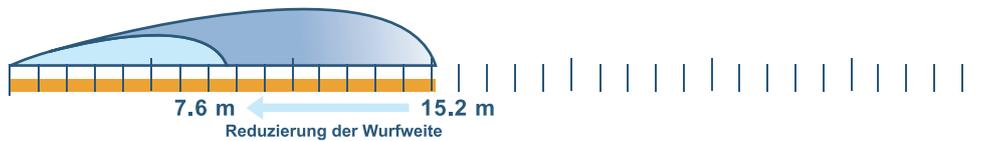

1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
6 - 22 mm/h  
25°, wahlweise 10°



### 5500



1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
7.3 - 28.9 mm/h  
25°



### FALCON 6504



1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
11 - 32 mm/h  
25°



### 7005



1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
14 - 25 mm/h  
25°



### 8005



1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
19 - 31 mm/h  
25°



### EAGLE 900/950



1.7 - 3.8 bar  
0.12 - 1.04 m<sup>3</sup>/h  
15 - 40 mm/h  
25°

