

PERROT SCHWINGHEBELREGNER

Die Wurfweite ist im Allgemeinen eines der ersten Kriterien bei der Auswahl eines Regners. Die aufgeführte Tabelle erlaubt Ihnen, eine Vorauswahl unter den Schwinghebelregnern zu treffen.




ZX 30 WR



2.0 - 4.5 bar
0.39 - 0.92 m³/h
2.0 - 6.4 mm/h
9° / 30°




ZA 7

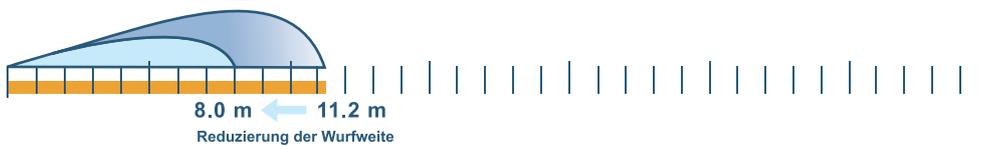

2.5 - 4.5 bar
0.69 - 1.96 m³/h
3.5 - 13.6 mm/h
7°



ZA 22

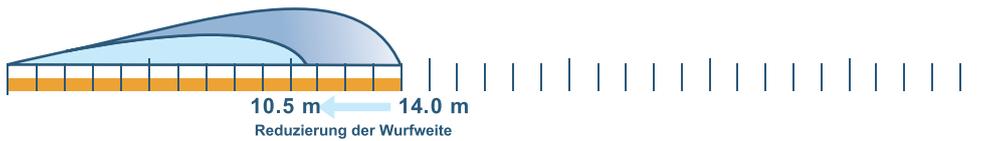


2.5 - 4.5 bar
0.69 - 1.89 m³/h
4.9 - 13.1 mm/h
22°




ZN 45



2.5 - 4.5 bar
0.99 - 3.39 m³/h
2.3 - 12.7 mm/h
45°




ZE 30

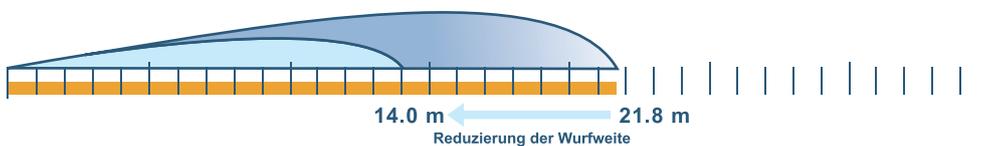

3.0 - 7.0 bar
1.25 - 4.60 m³/h
6.4 - 14.2 mm/h
30°




ZM 22

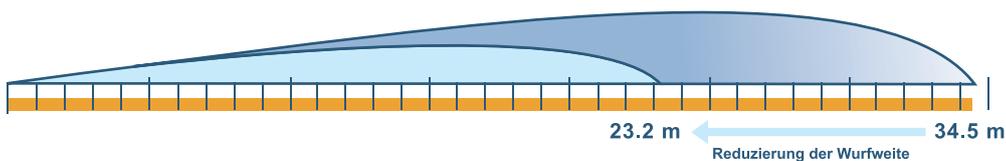

3.0 - 7.0 bar
6.16 - 24.10 m³/h
5.7 - 18.6 mm/h
22°



ZK 30

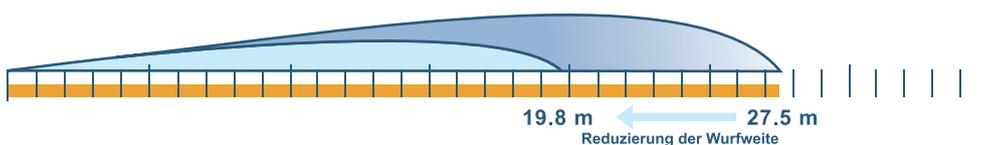

3.0 - 7.0 bar
3.94 - 11.39 m³/h
5.5 - 12.7 mm/h
30°

