


DIE RICHTIGE AUSWAHL

Die Wurfweite ist im Allgemeinen eines der ersten Kriterien bei der Auswahl eines Regners. Die aufgeführte Tabelle erlaubt Ihnen, eine Vorauswahl unter den Versenregnern zu treffen.



N-6700

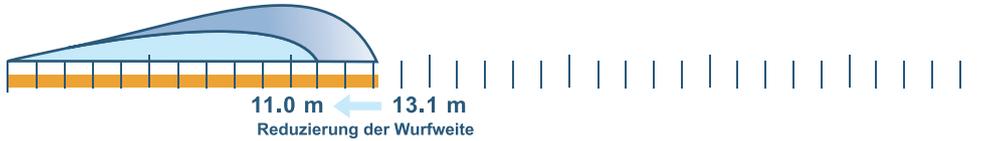

2.1 - 4.2 bar
0.43 - 1.18 m³/h
3.6 - 11.72 mm/h
23°



LVZX



2.5 - 5.0 bar
0.44 - 0.97 m³/h
2.0 - 6.4 mm/h
30°




LVZA



2.5 - 6.0 bar
0.90 - 1.76 m³/h
3.5 - 13.6 mm/h
22°




LVZE

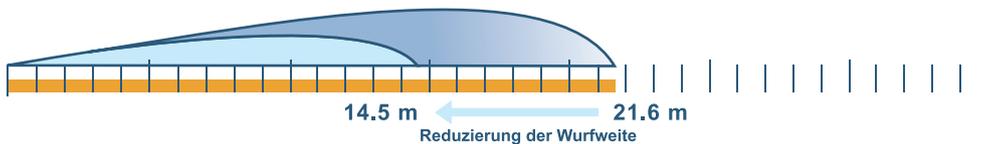

4.0 - 7.0 bar
2.63 - 8.86 m³/h
6.4 - 14.2 mm/h
22°




HYDRA

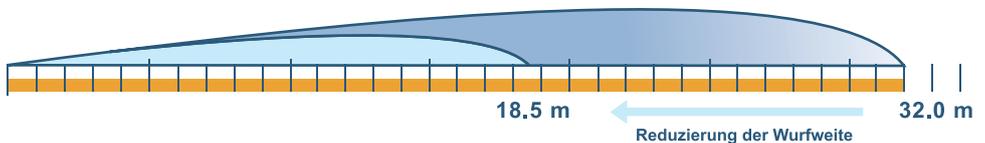

4.0 - 7.0 bar
3.47 - 23.16 m³/h
10 - 20 mm/h
25°




LVZR

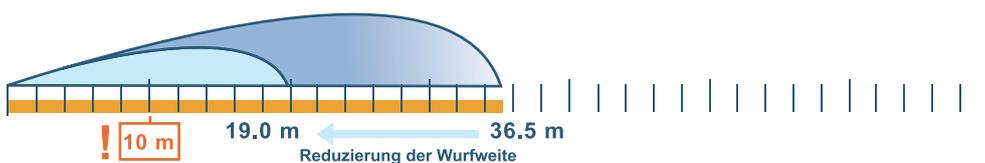

2.5 - 7.0 bar
4.28 - 27.06 m³/h
10 mm/h
22°



VP2

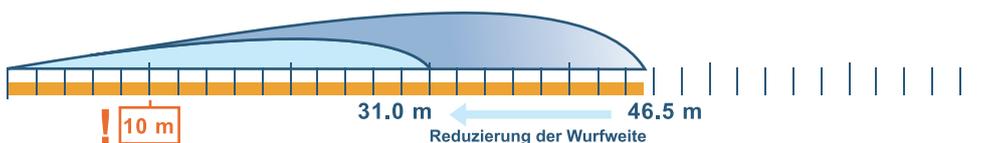

4.0 - 7.0 bar
21.70 - 68.40 m³/h
17 - 25 mm/h
23°

